




Model	Max Load	Output	Breaker	
S or LS	10	10W	1x1	12 volt Only
S or LS	36	36W	1x3	12 volt Only
S or LS	60	60W	1x5	12 volt Only
S or LS	96	96W		12 or 24 volt - VAC Only

Standard Item Above, Built to Order Below OR Specify Your Own Model

S or LS	20	20W		12 or 24 volt
S or LS	48	48W		12 or 24 volt


SD or LSD	10 *	10W	1x1	12 volt Only
-----------	------	-----	-----	--------------

TWO Separate Transformers

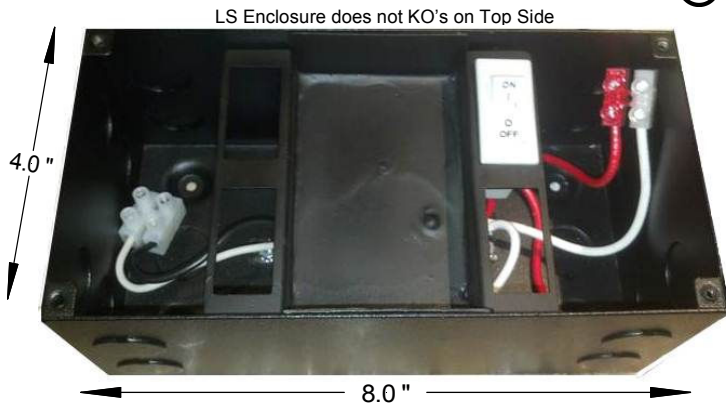

How To Order - The Mini

<input type="text"/>	"S" – Indoor Surface Mount "LS" – Indoor/Outdoor Surface Mount + Maximum Load (Watts)
<input type="text"/>	Input Voltage (Standard 120 VAC) Specify All other Voltages
<input type="text"/>	Nominal Output Voltage (12 VAC Standard) Single Output Voltage, Specify All other Voltages
<input type="text"/>	Additional Options
<input type="text"/>	
Example: S36-120-12DC-1x3 (As Shown in Photo)	
<ul style="list-style-type: none"> • Surface Mount Indoors (Wall or ceiling) – Model "LS" Indoors/Outdoors • Fully Loadable, Single Output Voltage • Made in The USA • Use LV Magnetic Dimmers Only • Includes Circuit Protection (Manual primary Breaker Optional) • Standard Unit 120 to 12 VAC (All other Voltages Built to order) 	
<p align="center">Converting AC to DC</p> <p>Optional AC to DC Module converts AC input to a Full Wave Rectified (unregulated, unfiltered) DC Output.</p> <p>For Constant Voltage, Utilize our Power Modules For Constant Current, Utilize our RPK Drivers</p> <p align="center">CALL FOR ASSISTANCE and ALL REQUESTS</p>	
<p>Model "S" – Indoor Enclosure made of CRS – Powdered Black Model "LS" – Indoor/Outdoor Enclosure made of Stainless Steel (SS)</p> <p>(C) = 4 foot Cord + Grounded Plug (PH) = Photocell (Model LS only) Primary Magnetic Breaker (+P) – Thermal Auto Reset Protection Standard</p>	
Reserve the right to update without Notice	

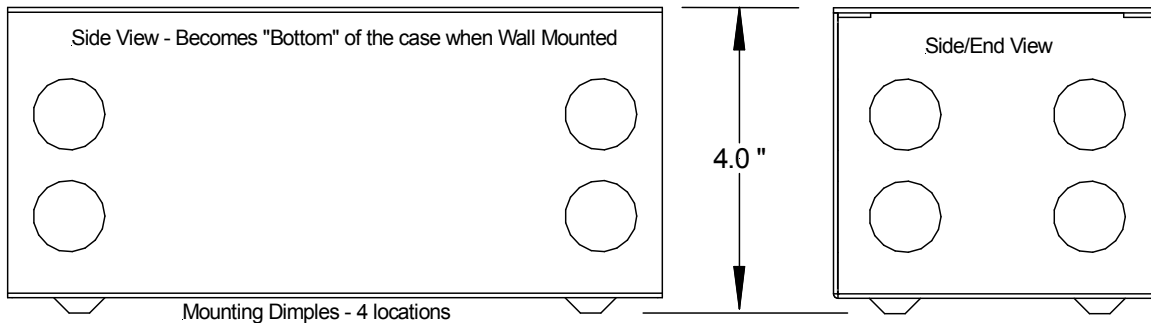

The Mini is an indoor or indoor/outdoor transformer that produces a single Output Voltage. No De-Rating Required.

All transformers are impregnated and encapsulated. Standard units mount Indoors (Model "S") in an ambient temperature up to 40C (104F). Model "LS" mounts indoors/outdoors; must be at least 12 inches above the ground. Mounting dimples incorporated into the enclosure for easy installation. Warranted 1 Year. N.E.C. compliant, UL Listed, energy efficient and safe. Transformers and circuit breakers are magnetic for rugged reliable service.

All other Voltages and Options by request.

Job Name:

Type: